




NOTES:

- Current Rating: 2.0AMP
- Contact Resistance: 20mΩ Max
- Withstand Voltage: 500V AC/DC
- Insulation Resistance: 1000MΩ
- Operation Temperature: -40°C to +105°C
- Contact Material: Phosphor Bronze
- Contact plating: Au Or Sn over Ni
- Insulator Material: LCP+30%GF UL94V-0

Ordering Information

2245T - 2 XX M XX D U N X 2

- No. of Pins per ROW: 02-40PIN
- Contact Plating: GP=Gold Flash, G3=10μ Gold, G4=15μ Gold, G5=30μ Gold, SP=Gold Flash/Tin, S3=10μ Gold/Tin, S4=15μ Gold/Tin, S5=30μ Gold/Tin, SN=Tin, SM= Matte Tin
- Packing: T=Tube, P=Tube+CAP, R=Tap&Reel+CAP

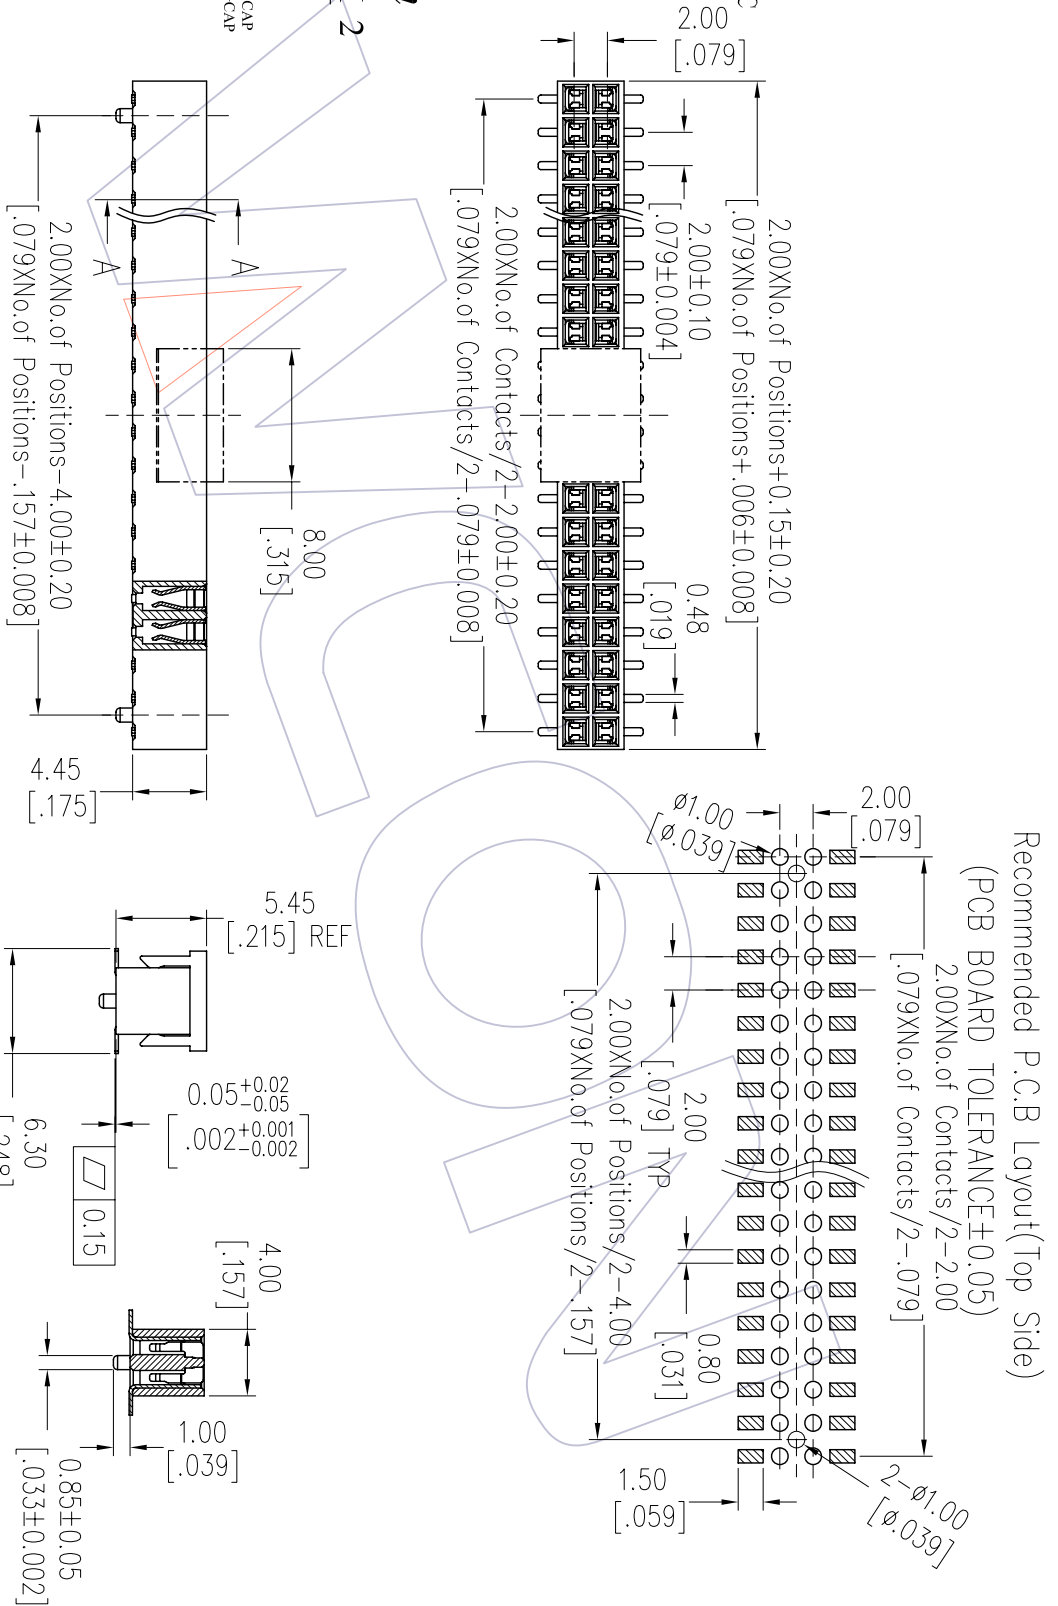

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)
 2.00XNo. of Contacts/2-2.00
 2.00XNo. of Contacts/2-.079

Item	Pitch	Mating
Standard	2.00	1215/1220
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
									2245T-2XXMXXDUNX2	PH2.00 Dual Row Top Enter If=4.45		
A0	2012/07/17	NEW		X.X	JYHuang	2012/07/17	±0.25	A4				
				X.XXX	CHECK	DATE	±0.15	1/1				
				Angle	APPROVE	DATE	± 3°					
				DIM			TOL					



Http: www.wcon.com