

HSF**NOTES:**

Current Rating: 3.0AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000MΩ Min
Operation Temperature: -55°C to +105°C


Contact Material: Phosphor Bronze/Brass
Contact plating: Au Or Sn over Ni
Insulator Material: PBT+30%G.F UL94V-0
Sheet: Cold Roller Steel, Ni Or Sn Plated
Nut: Brass, Sn Over Ni Plated

Ordering Information**6222-XX MX XX B01**

No. of Pins: 9P
Type: Y: With Back Fork
15P B: With Back Nut
25P F: With Front Nut
37P H: With Front Nut
With Back Fork
N: Without Fork
Without Nut

Contact Plating: S0=Gold Flash/Tin
S3=10u"Gold/Tin
S4=15u"Gold/Tin
S5=30u"Gold/Tin
SN=Tin

Insulator Color: W= White
B= Black
U= Blue

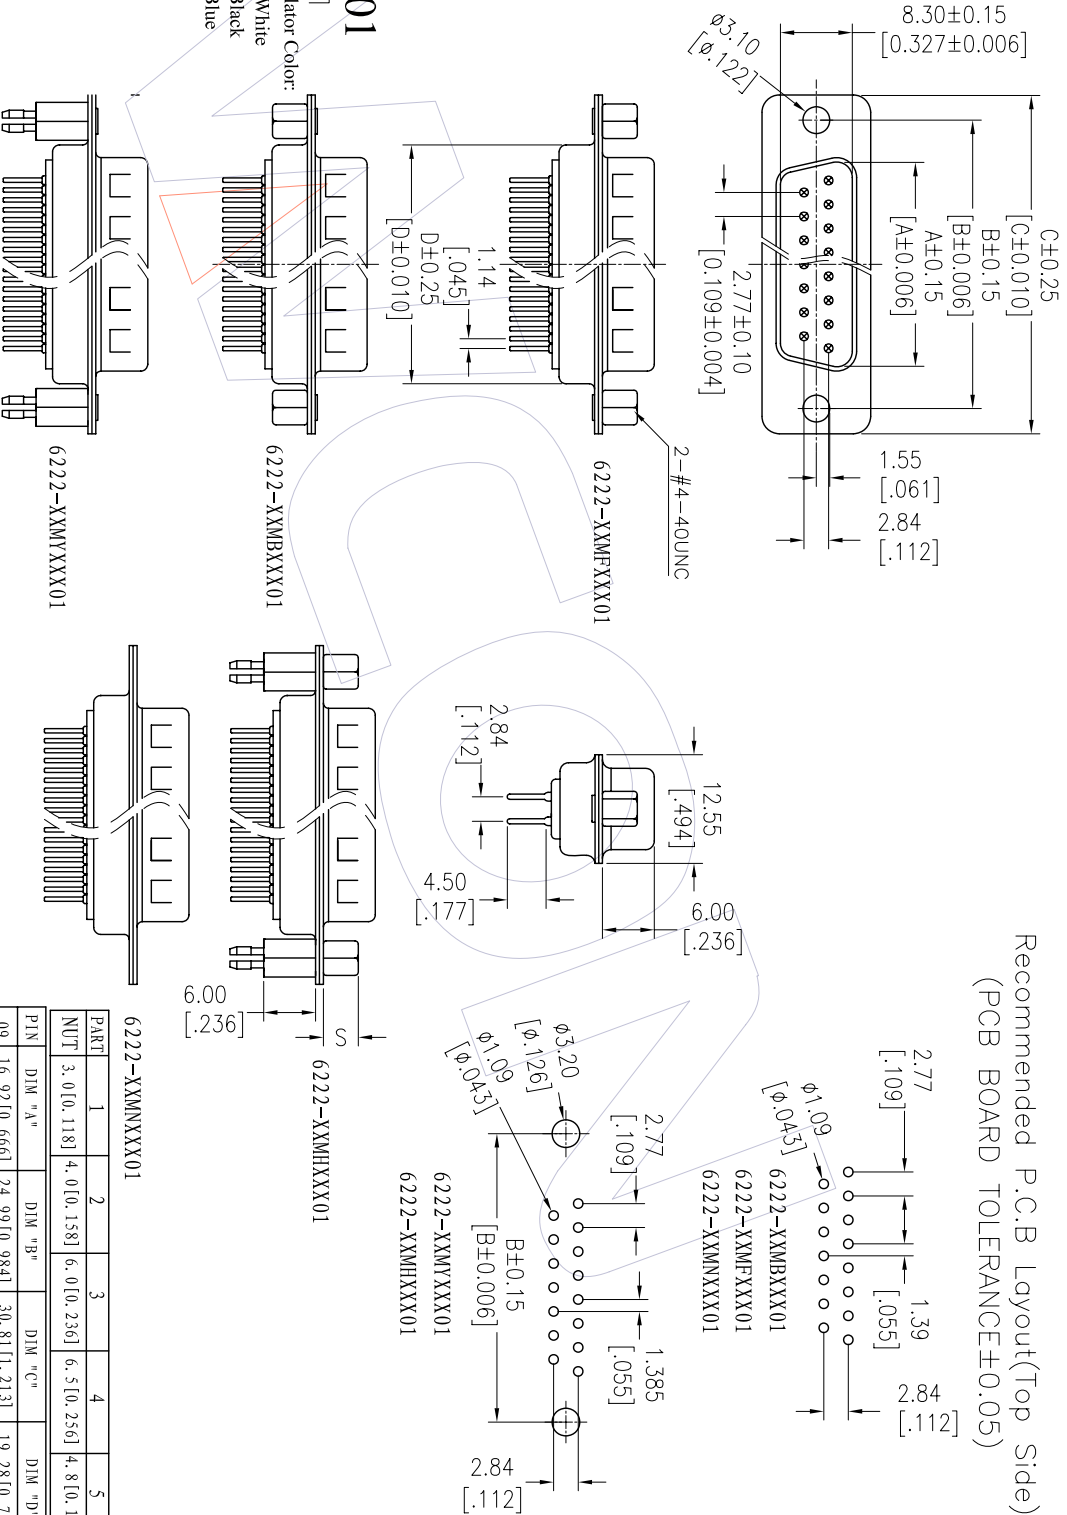

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05)

PART	1	2	3	4	5
NUT	3.0 [0.118]	4.0 [0.158]	6.0 [0.236]	6.5 [0.256]	4.8 [0.189]

PIN	DIM "A"	DIM "B"	DIM "C"	DIM "D"
09	16.92 [0.666]	24.99 [0.984]	30.81 [1.213]	19.28 [0.759]
15	25.25 [0.994]	33.32 [1.312]	39.14 [1.541]	27.70 [1.091]
25	38.96 [1.534]	47.04 [1.852]	53.10 [2.091]	41.10 [1.618]
37	55.42 [2.182]	63.50 [2.500]	69.32 [2.729]	57.30 [2.256]

WCON

Http: www.wcon.com

WCON-Dongguan

Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan

Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com

REV	DATE	MODIFICATION DESCRIPTION
A0	2012/12/05	NEW

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:
XX	JYHuang	2012/12/05	±0.40	mm	6222-XXMNXXX01	D-SUB MALE DUAL ROW 180° DIP
XX	CHECK	DATE	±0.25	A4		
X.XXX	APPROVE	DATE	±0.15	1/1		Customer NO.
Angle			± 3'			
CHANG						
DIM			TOL			