



NOTES:


Current Rating:1.0A
 Voltage Rating:250V AC,DC
 Contact Resistance:20mΩ max
 Withstand Voltage:500V AC/minute
 Insulation Resistance:1000MΩ min
 Operation Temperature:-25℃ to +85℃

Contact Material:Phosphor Bronze
 Contact plating:Au Over Ni
 Insulator Material:PBT+30%G.F.(UL94V-0)

Ordering Information

5260 - XX B P XX B N X 1

| | | | | |
|-------------|----------------------|-------------------|--------------|-----------|
| No. of Pins | No. of Pins | Contact Plating | Color | Packaging |
| 10P 34P | A=With clashboard | G0=Gold Flash | B=Black | A=Tray |
| 14P 40P | B=Without clashboard | G1=3u"Gold | U=Blue | T=Tube |
| 16P 50P | | G2=5u"Gold | G=Grey(427C) | |
| 20P 60P | | G3=10u"Gold | E=Grey(413C) | |
| 26P 64P | | G4=15u"Gold | | |
| | | G5=30u"Gold | | |
| | | S0=Gold Flash/Tin | | |
| | | S1=3u"Gold/Tin | | |
| | | S2=5u"Gold/Tin | | |
| | | S3=10u"Gold/Tin | | |
| | | S4=15u"Gold/Tin | | |
| | | S5=30u"Gold/Tin | | |
| | | SN=Tin | | |

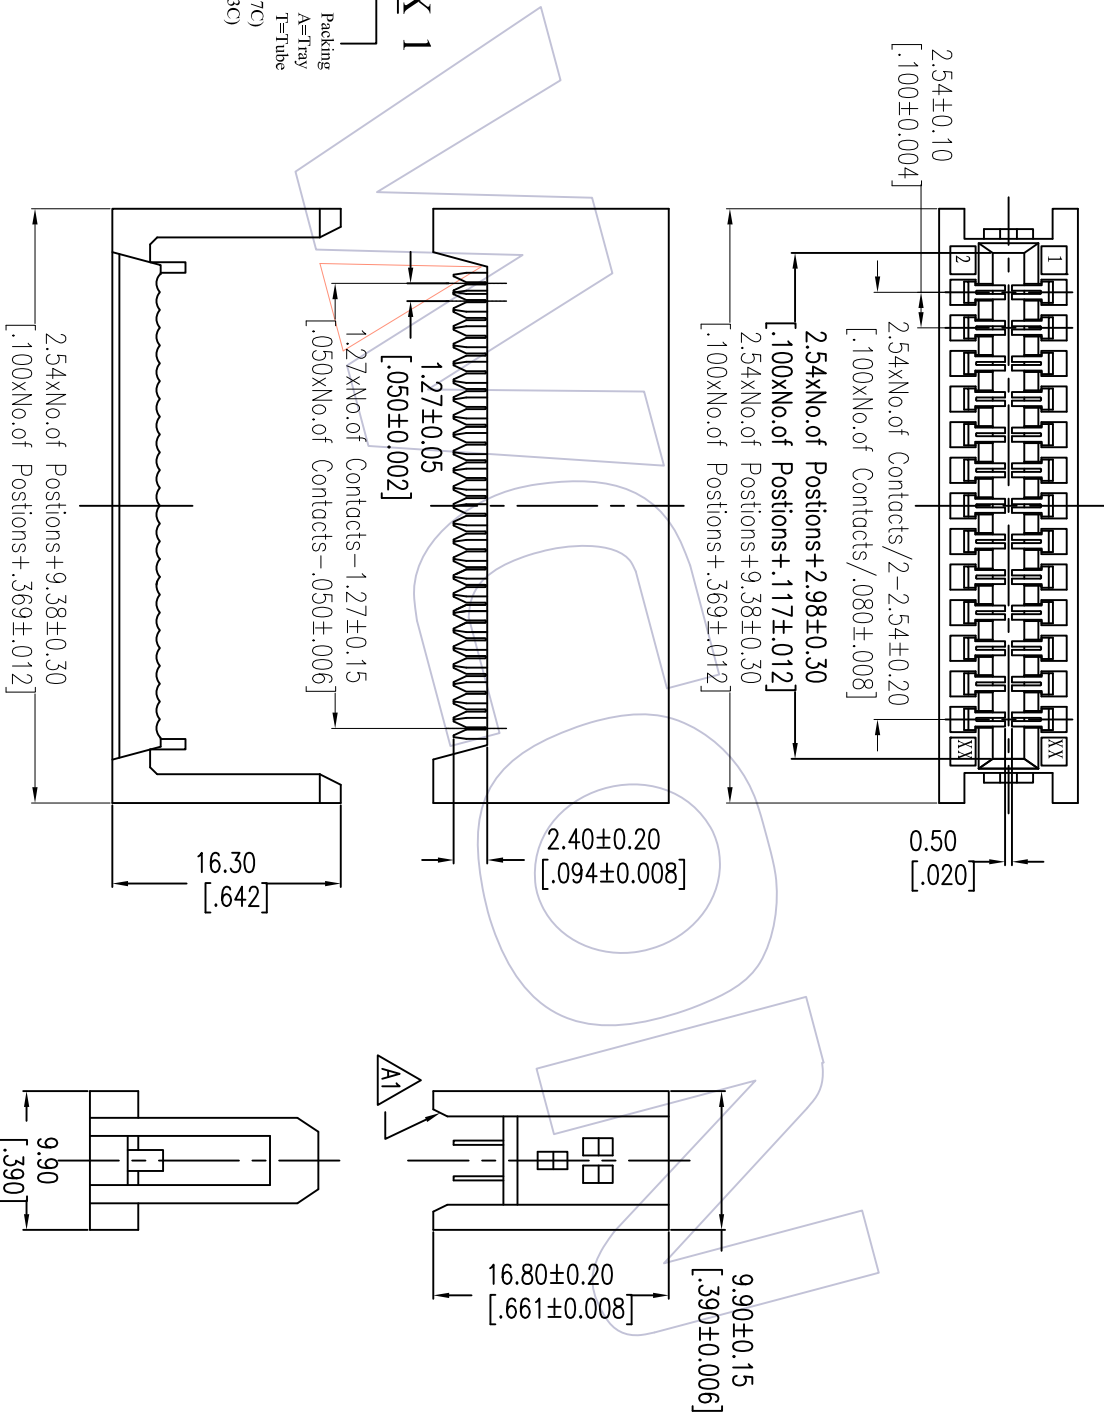

| | | | | | | | | | | | |
|-----|----------|--------------------------|--------|-----------|---------|----------|-------|-----------------|---------------------|------------------------|------------------------|
| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | OPERATION | DRAW | DATE | SCALE | PART NO. | TITLE: | WCON-Dongguan | WCON-Kunshan |
| A1 | 11/10/28 | Modify drawing | | XX | TANG | 11/10/28 | mm | 5260-XXBPXXBNX1 | CE SOCKET CONNECTOR | Http: www.wcon.com | |
| A0 | 08/11/25 | NEW | | XX | CHECK | | A4 | | | Tel: +86 769 85358920 | Tel: +86 512 57468408 |
| | | | | X.XXX | ±0.15 | | 1/1 | Customer NO. | | Fax: +86 769 85358915 | Fax: +86 512 57468468 |
| | | | | Angle | APPROVE | DATE | PROJ. | | | E-mail: sales@wcon.com | E-mail: sales@wcon.com |



WCON-Dongguan
 Http: www.wcon.com
 WCON-Kunshan
 Tel: +86 769 85358920
 Fax: +86 512 57468408
 E-mail: sales@wcon.com
 Tel: +86 512 57468468
 Fax: +86 512 57468468
 E-mail: sales@wcon.com